



Power of Desire



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.
Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S. G, Highway, Ahmedabad- 382481, Ph.: 079-27661103 & 04
Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913
www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics



DURASTONE / CAT / AUGUST 2023

DURASTONE
HEAVY DUTY VITRIFIED TILES

SOMANY
Tiles | Bathware

ZAMEEN SE JUDEY

400x
400mm **ULTRA
STRONG**
OUTDOOR VITRIFIED TILES

UNIT-3
FOR ALL INDIA

Turkish Touch with Toughest Core

Experience the charm of the Mediterranean with our exquisite 400x400mm Durastone outdoor tiles, harmonizing beautifully with the sandstone ochre. These tiles redefine outdoor aesthetics, offering a remarkable fusion of design and precision. Versatility shines through as these tiles seamlessly fit into various spaces, showcasing a captivating outdoorsy ambiance. Discover a myriad of application possibilities in our catalog, ensuring you embrace the finest essence of the outdoors.

DURASTONE
HEAVY DUTY VITRIFIED TILES

400x
400mm

ULTRA STRONG
OUTDOOR VITRIFIED TILES

KEY FEATURES




Anti Skid



Frost Resistance



High Flexural Strength



Chromatic Properties



Wear Resistance



Eco Friendly & Recyclable



Easy To Clean



Suitable For Indoor & Outdoor Application



Size



Fire Resistance




Chemical Resistance



Thickness



Heavy Load Bearing



High Mechanical Resistance



Floor Tiles

APPLICATION AREA



Garden



Exit Area



Industrial Area



Pavement



Parking



Swimming Area



Railway



Metro



Gazebos



DURASTONE
HEAVY DUTY VITRIFIED TILES


DELANI GREY STONE

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

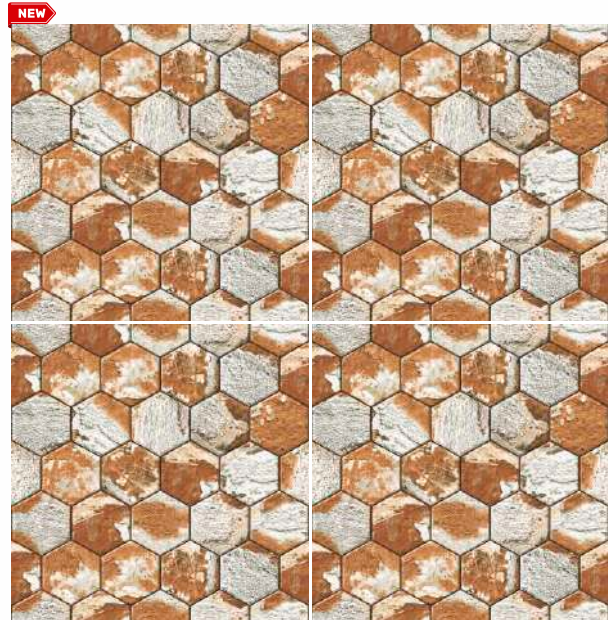


ALOISE BROWN

V1

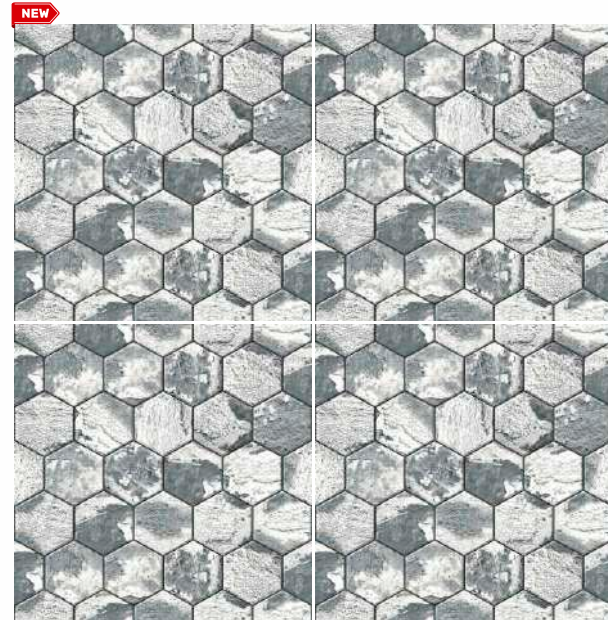


ALOISE GREY

V1

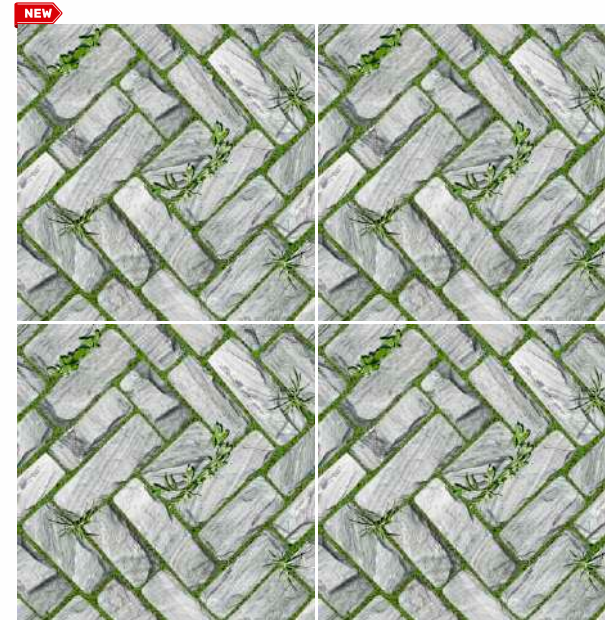


DELANI GREY STONE

V1

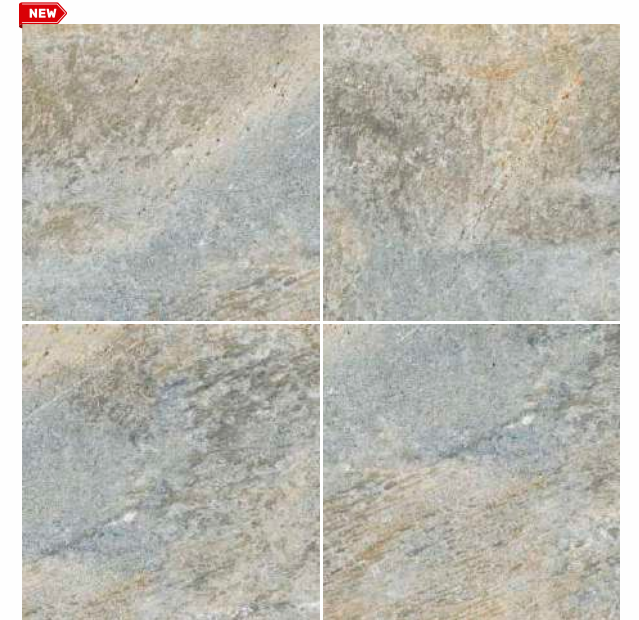

MARTIAL BLUE

V4

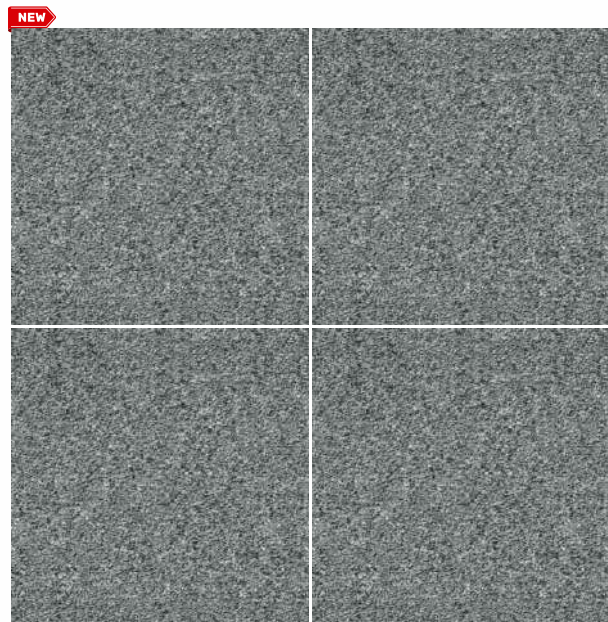

CORINNE GREY DARK

V1




CORINNE GREY LIGHT

V1



PETRUS BROWN

V1

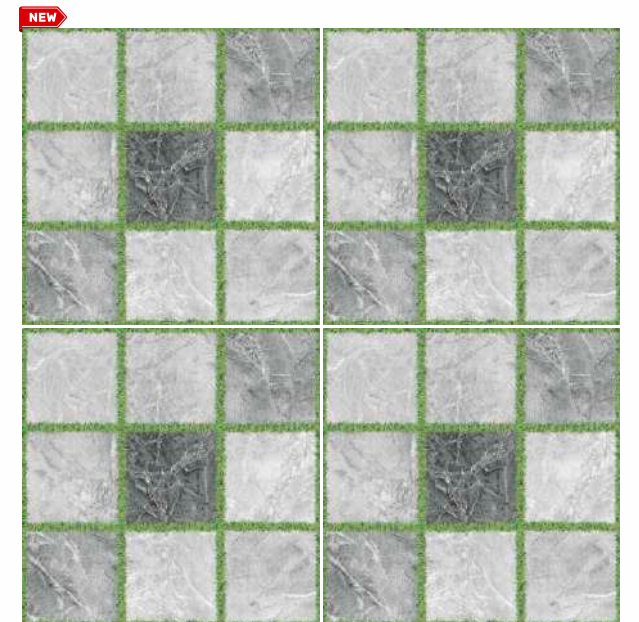

PETRUS GREY

V1

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES



EDITH DÉCOR -01

V1

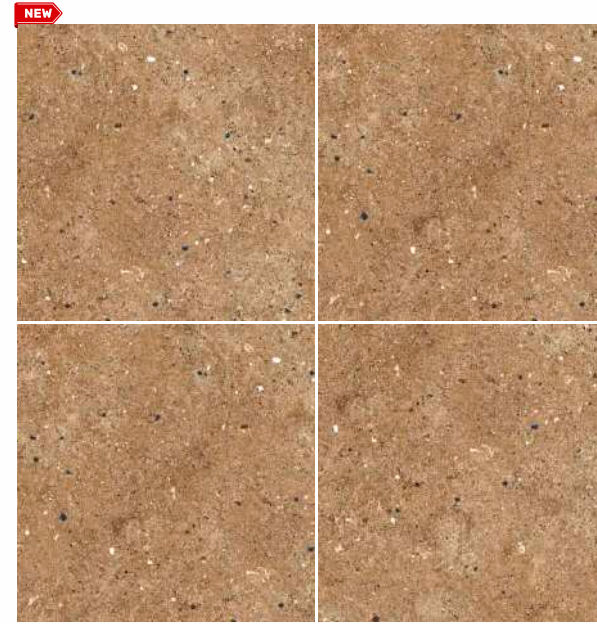


LEONCE BEIGE

V3




SEVERIN CARAMEL

V3

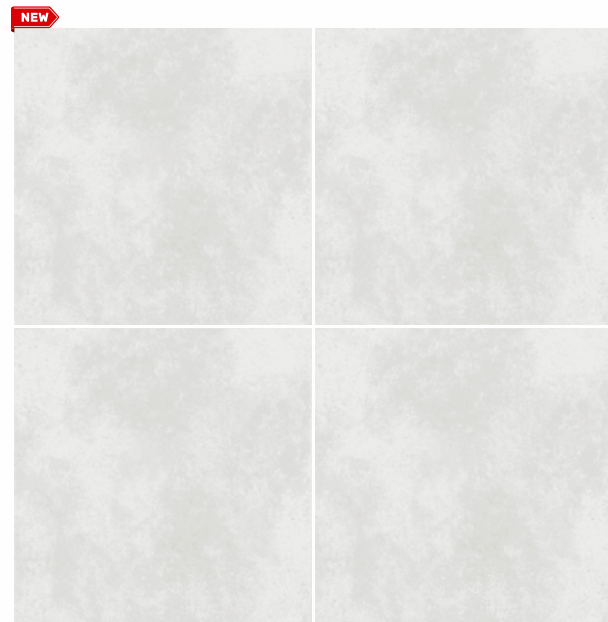

EDITH LIGHT

V1

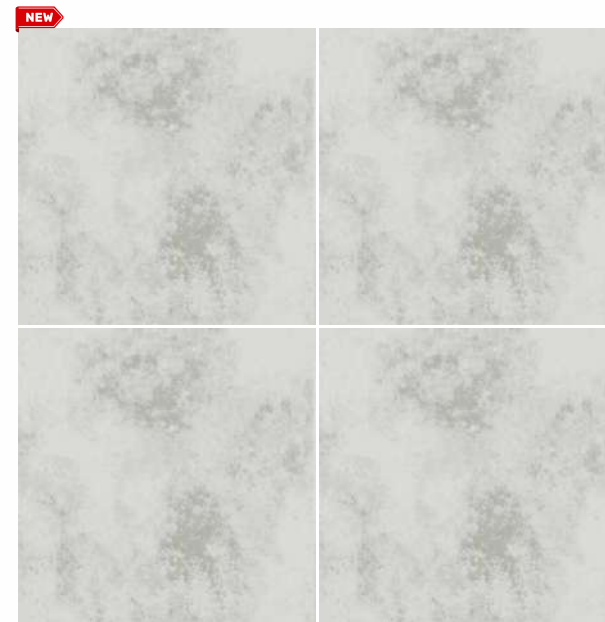


EDITH DARK

V1



SEVERIN GREY

V3

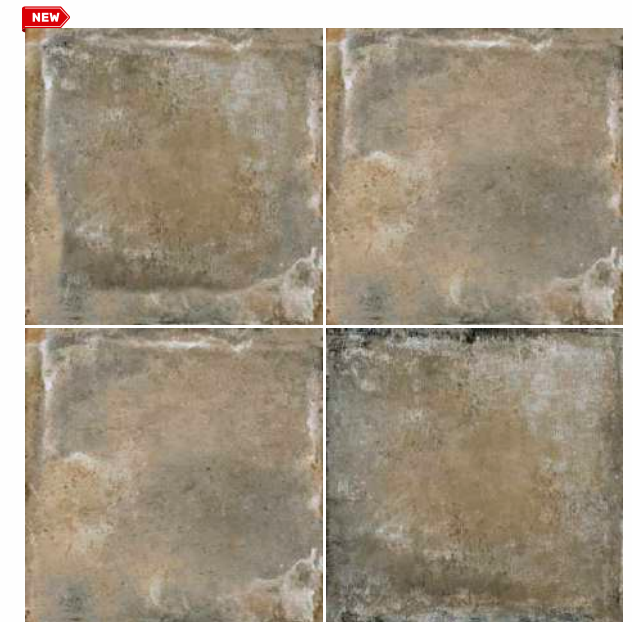

SEVERIN RUST

V3

DURASTONE

HEAVY DUTY VITRIFIED TILES




CASINO BLUE

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

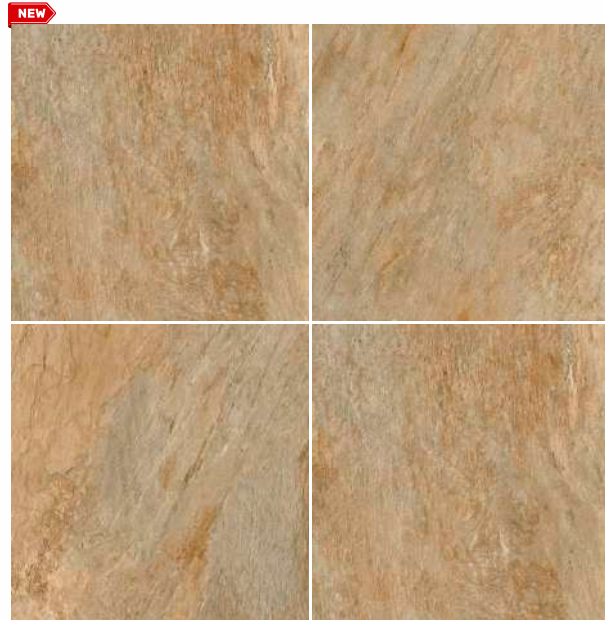

REGIS BEIGE

V3

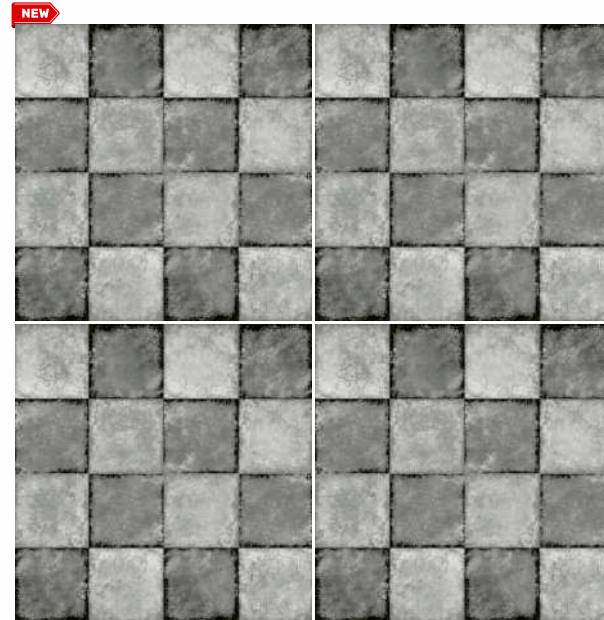

OTHON GREY DARK

V1



ALROCK BEIGE

V3



ARDOISE NERO

V3




AVANA BROWN

V4




AVANA NATURAL

V4

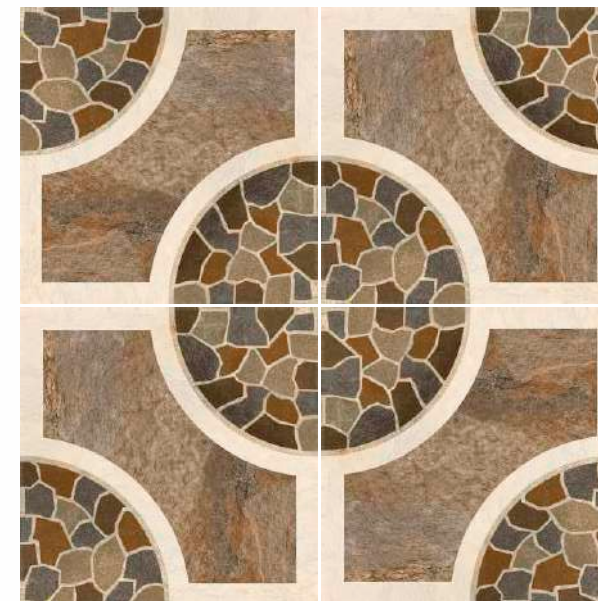

CASINO BLUE

V1

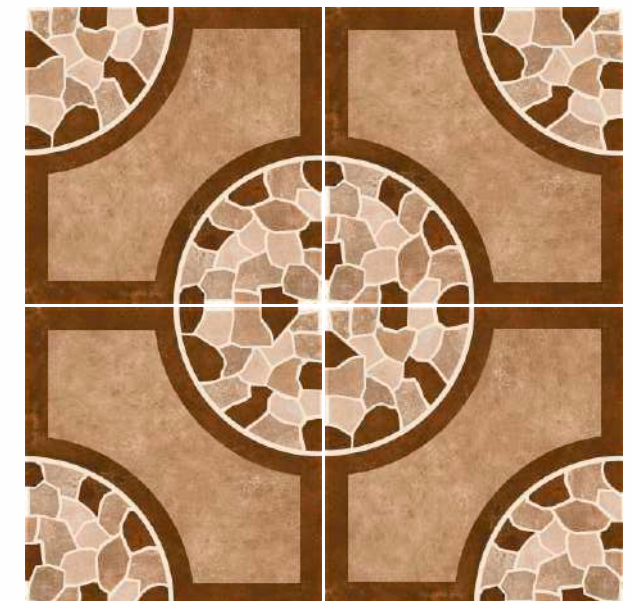

CASINO BROWN


V1

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm



DURASTONE
HEAVY DUTY VITRIFIED TILES

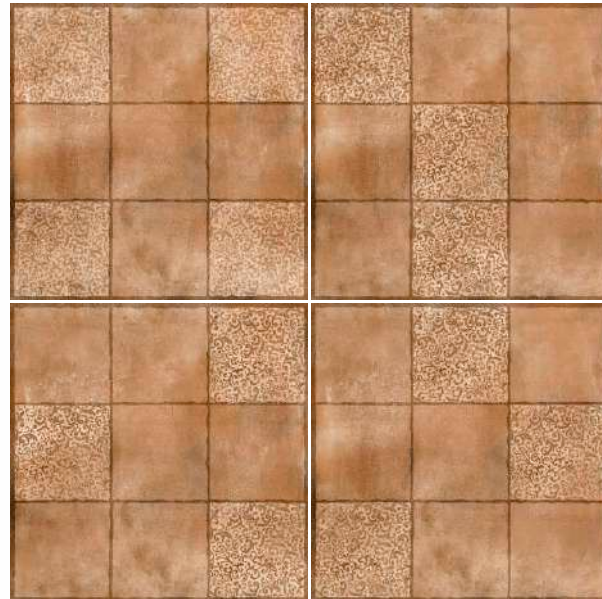

CAJA BEIGE

V4




CAJA BROWN

V1



CIAZ BROWN

V1

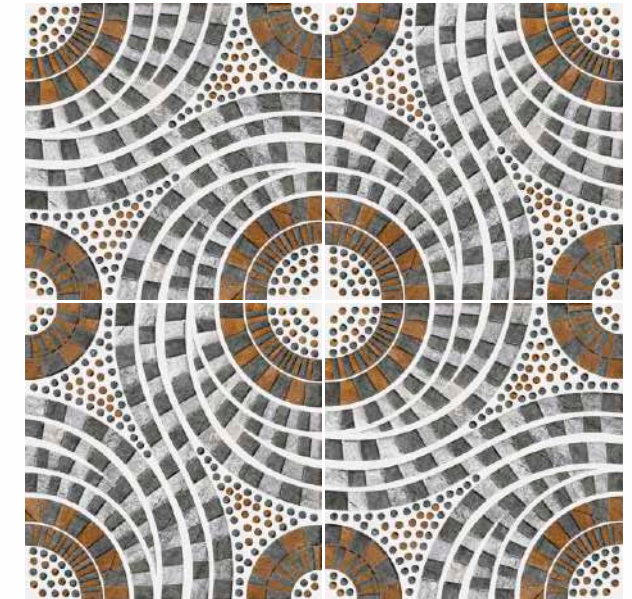

CIAZ GREY

V1




CASSIS DECOR

V1




CASSIS GREY

V1

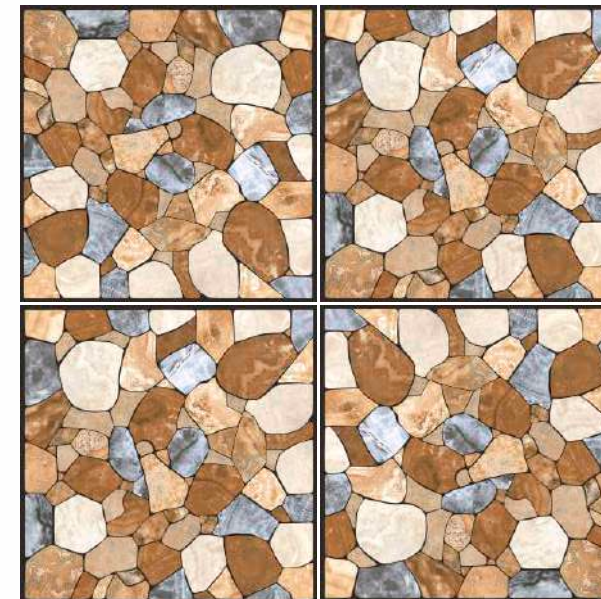

CRAG BLUE

V1

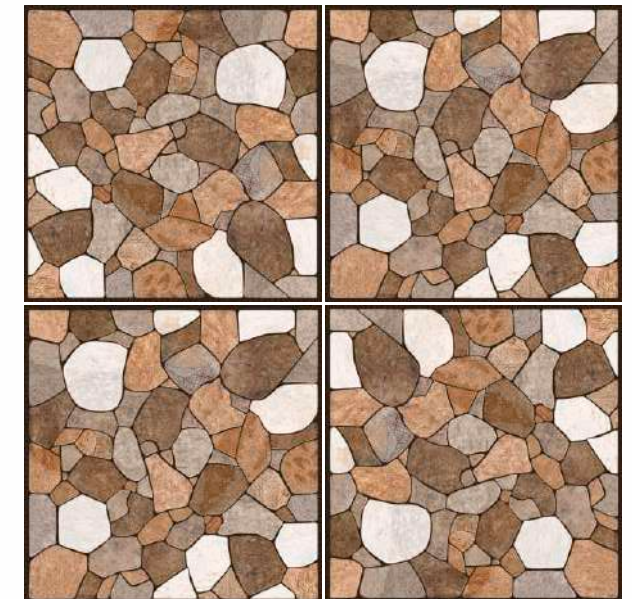

CRAG BROWN

V1



DURASTONE

HEAVY DUTY VITRIFIED TILES


DRESDE GREY & GRIS

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

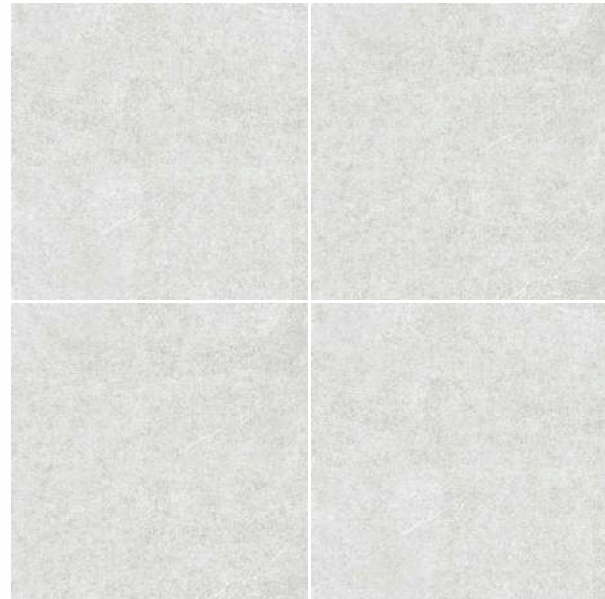

DRESDE GREY

V2

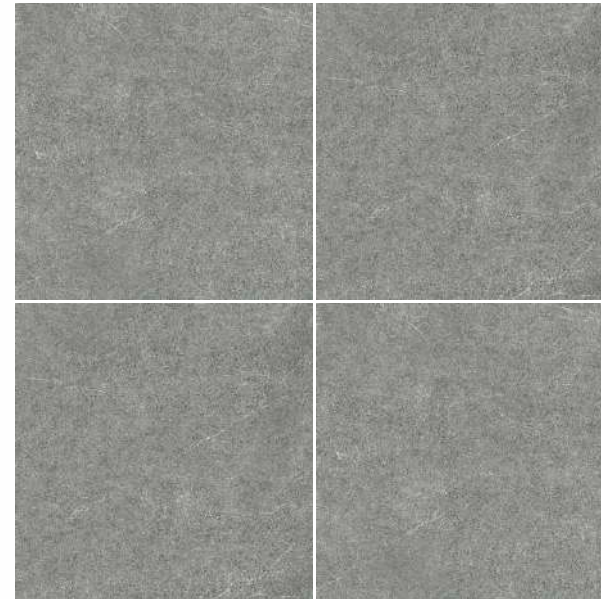

DRESDE GRIS

V2




ESTUCO BEIGE

V1



ESTUCO BEIGE DECORE

V1

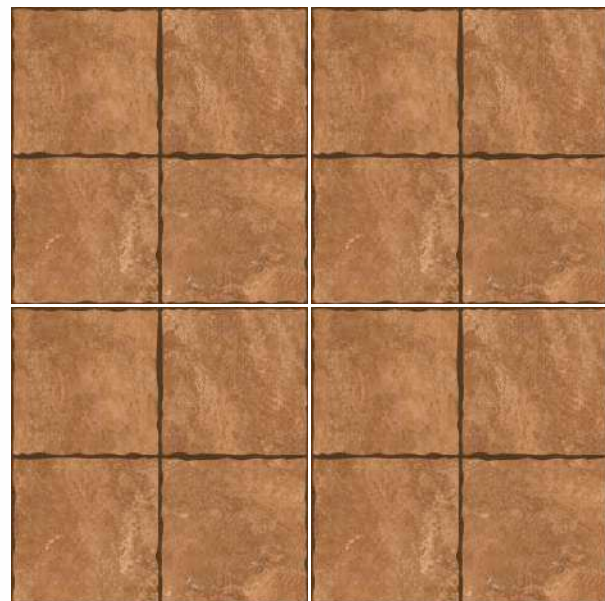

ESTUCO COTTO

V1




ESTUCO COTTO DECORE

V1



ETNICO NATURAL

V1

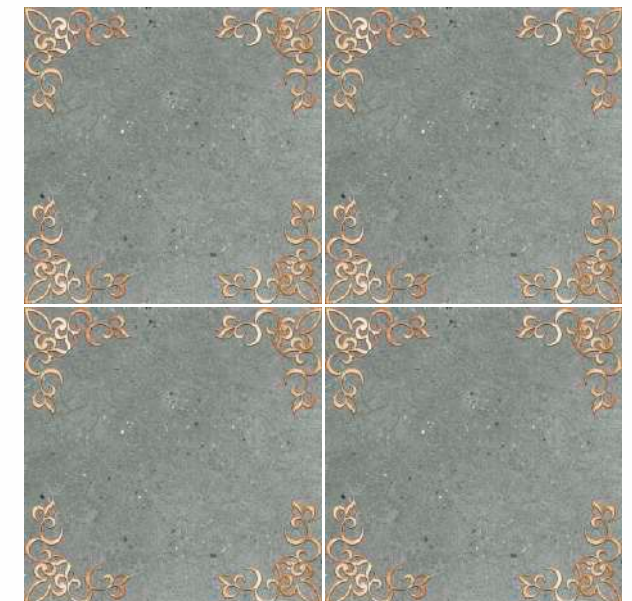

ETNICO NERO


V1

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm



DURASTONE
HEAVY DUTY VITRIFIED TILES

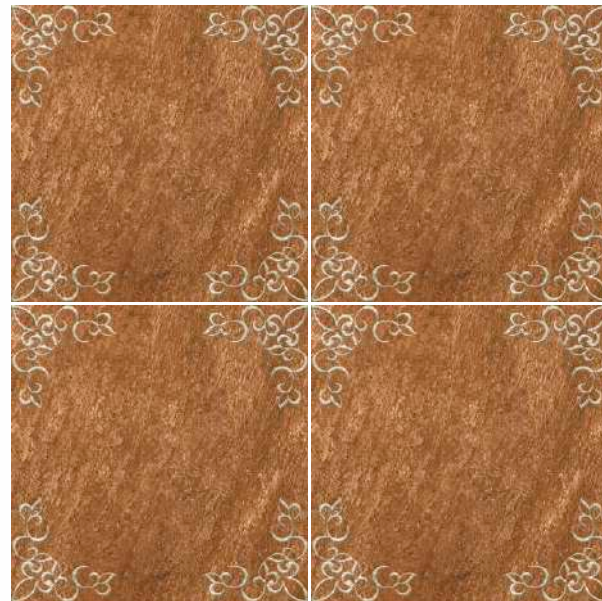


ETNICO BROWN

V1



ETNICO GREY

V1

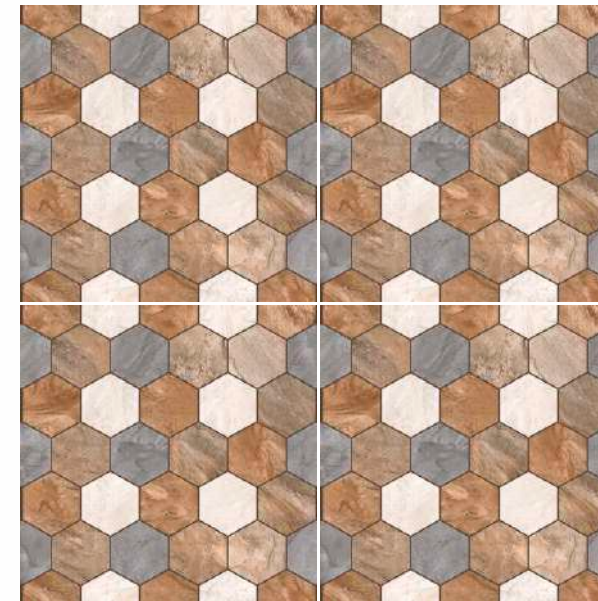


HEXON MULTI

V1




HOLZ GREY

V1

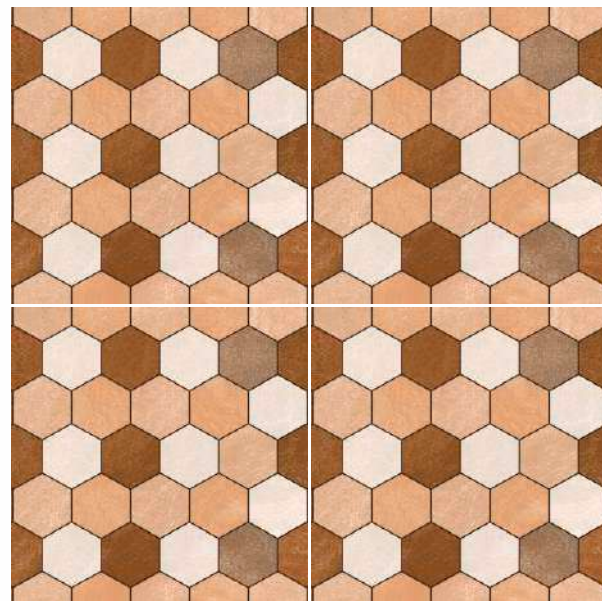

HEXON BROWN

V1

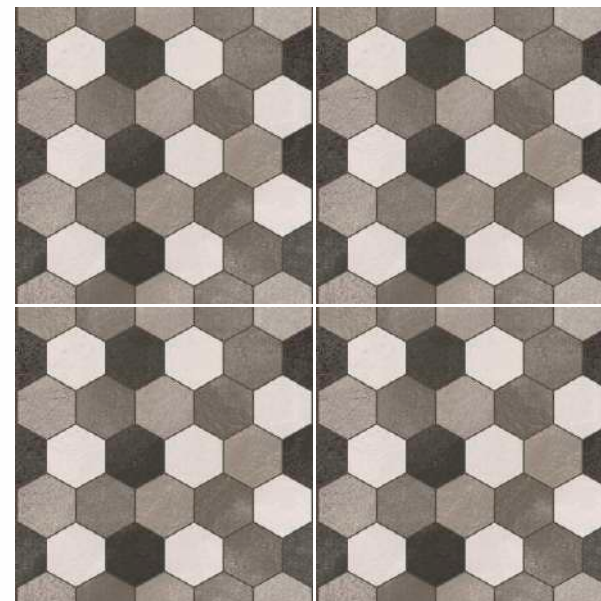

HEXON GREY

V1



HOLZ BEIGE

V1



HOLZ COTTO

V1



DURASTONE

HEAVY DUTY VITRIFIED TILES

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES




KANSAS COTTO

V1

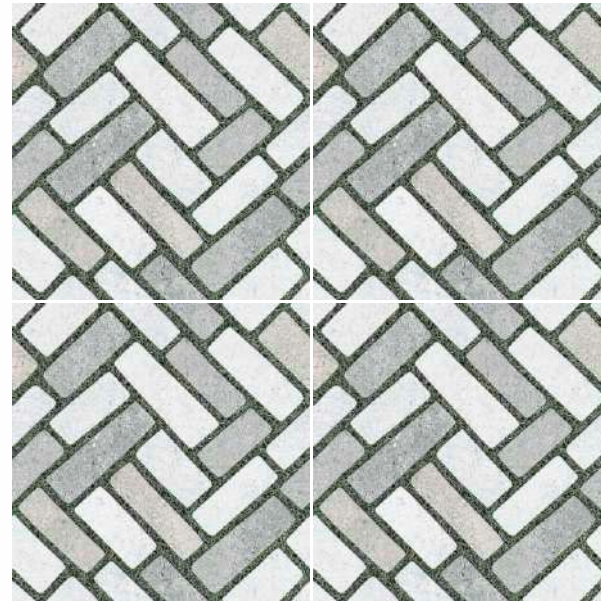

KANSAS GREY

V1

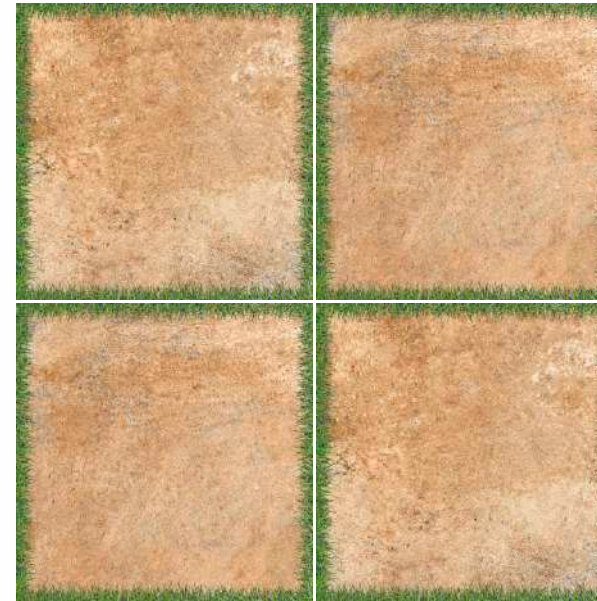

LEVANTE COTTO

V2



MACRO STONE

V3



KAPPA COTTO

V1




KAPPA GREY NATURAL

V1



MATTONE DARK GREY

V1

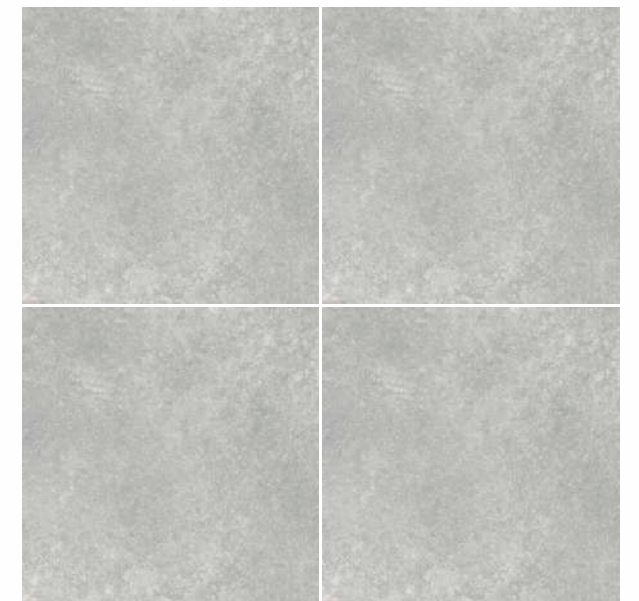

MATTONE LIGHT GREY


V1

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

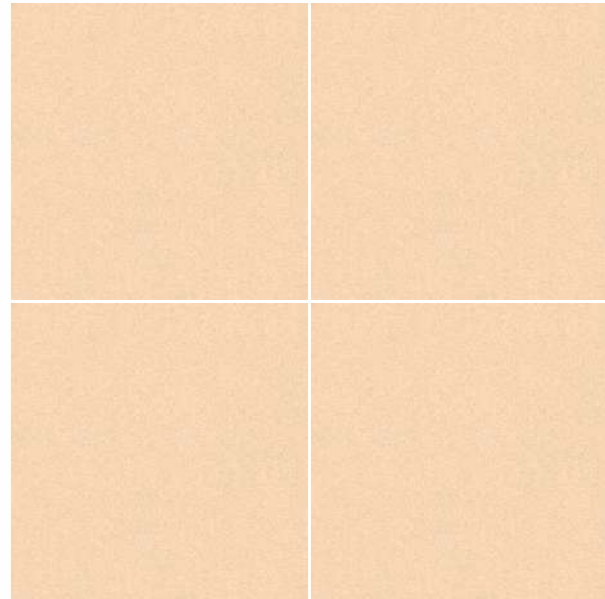


POLARIS BEIGE

V1

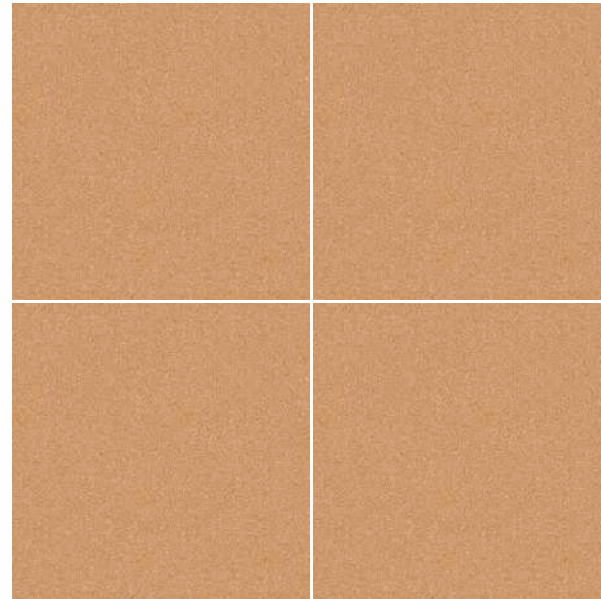


POLARIS BROWN

V1

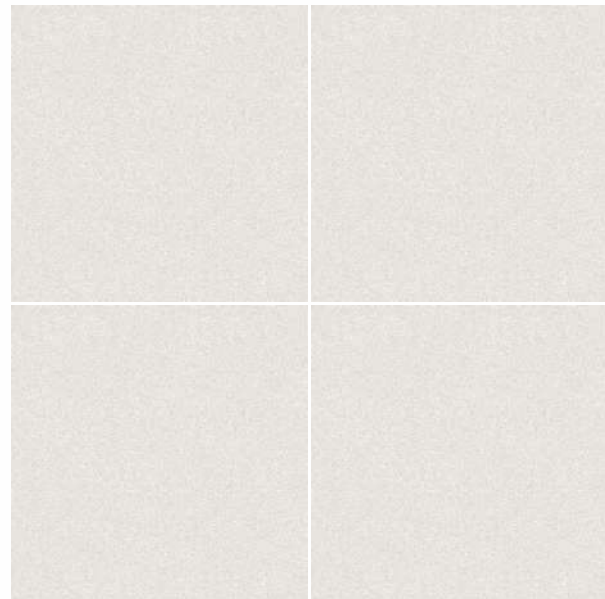


POLARIS GREY

V1

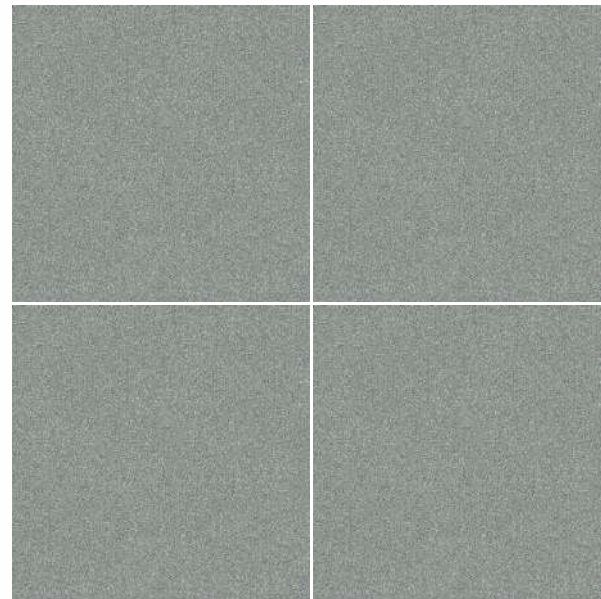


POLARIS GRIS

V1

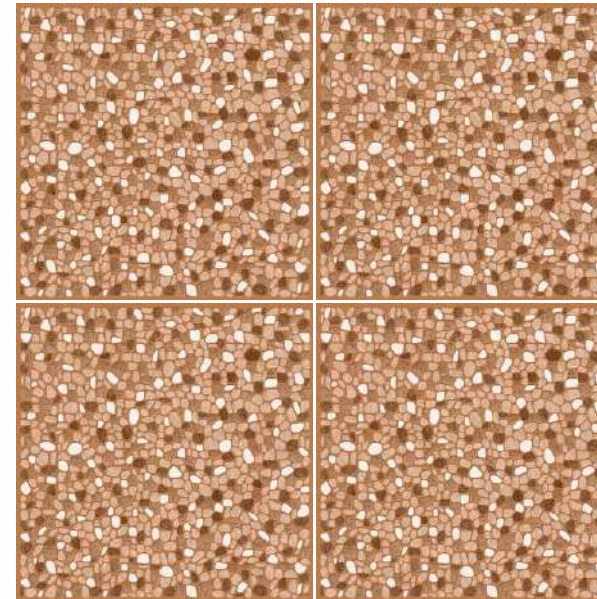


PIERRE BROWN

V1

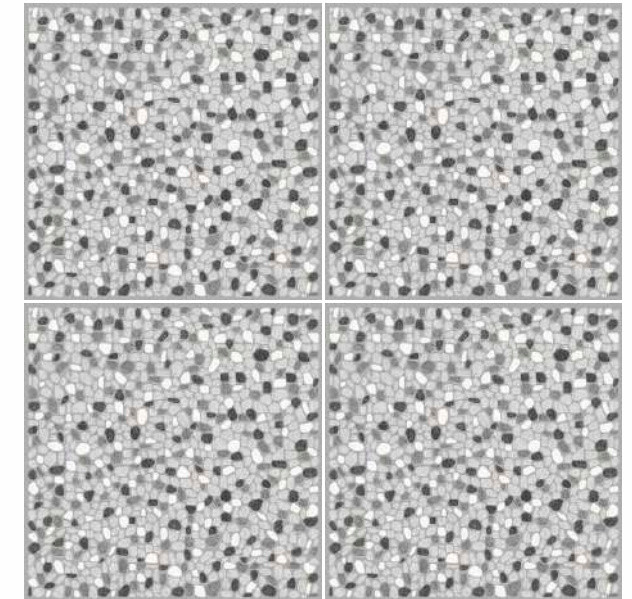

PIERRE GREY

V1

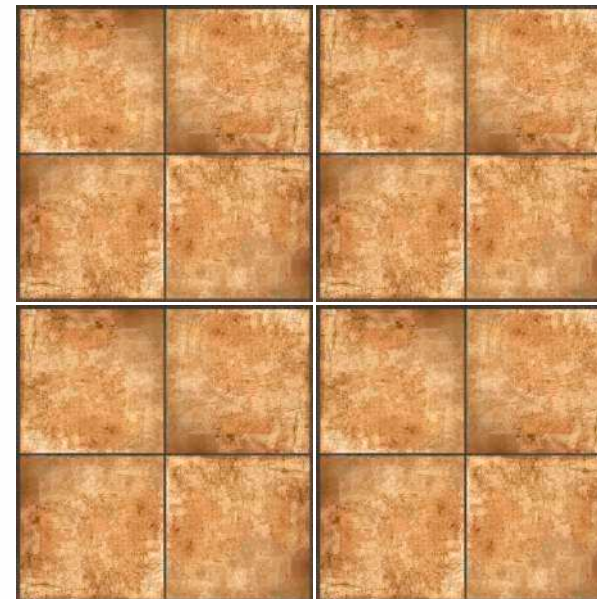

ROBIN BROWN

V1



ROBIN DECOR

V1



DURASTONE
HEAVY DUTY VITRIFIED TILES


PODERO GRISH & DECOR

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

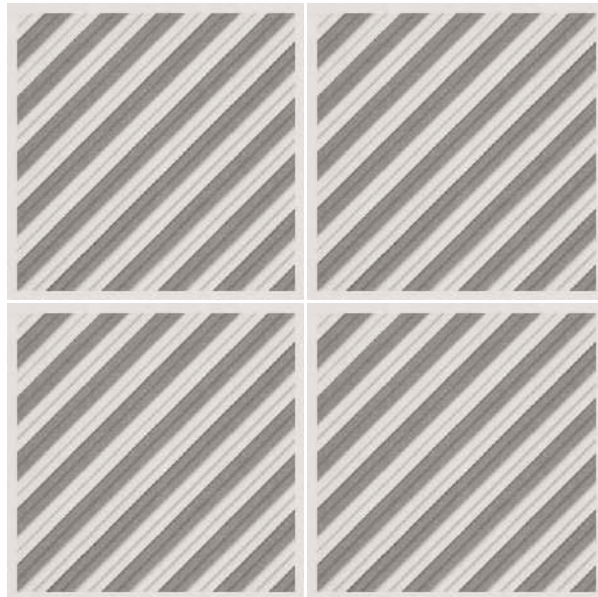


PODERO GRISH DECOR

V1

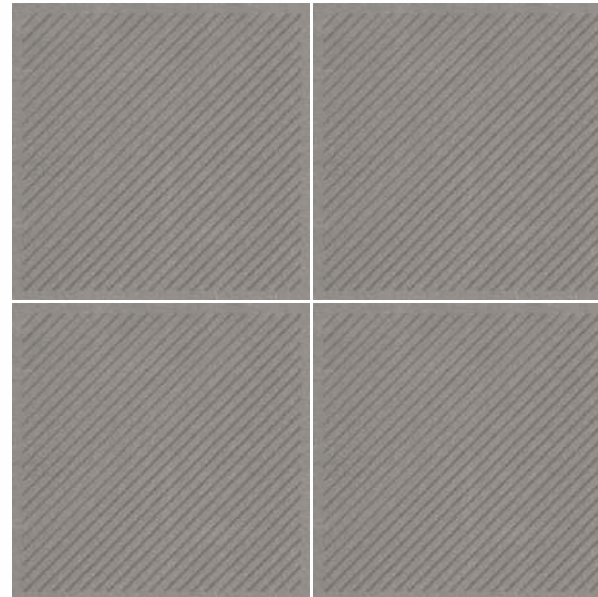

PODERO GRISH

V1

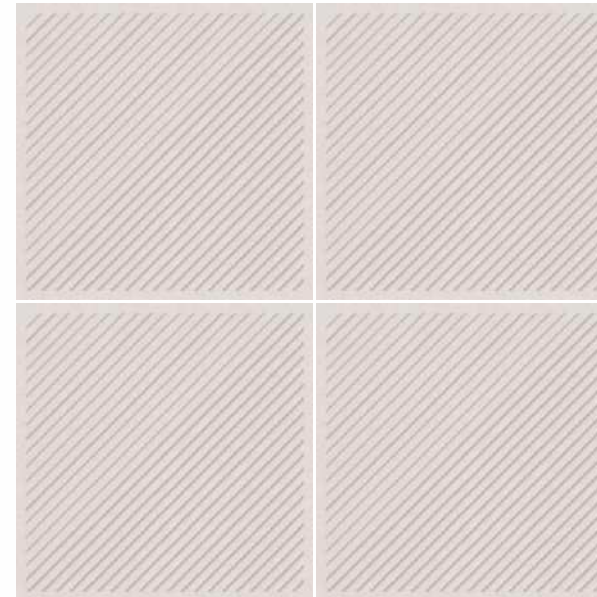


PODERO GREY

V1




SPARTA GREY

V1

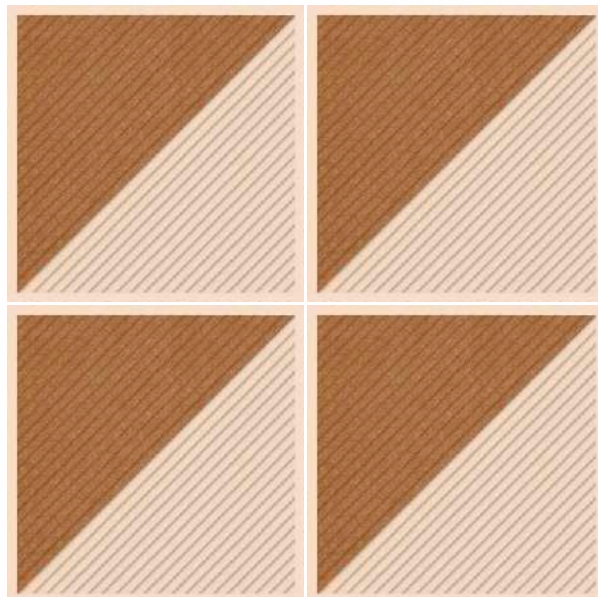


PODERO BROWN DECOR

V1

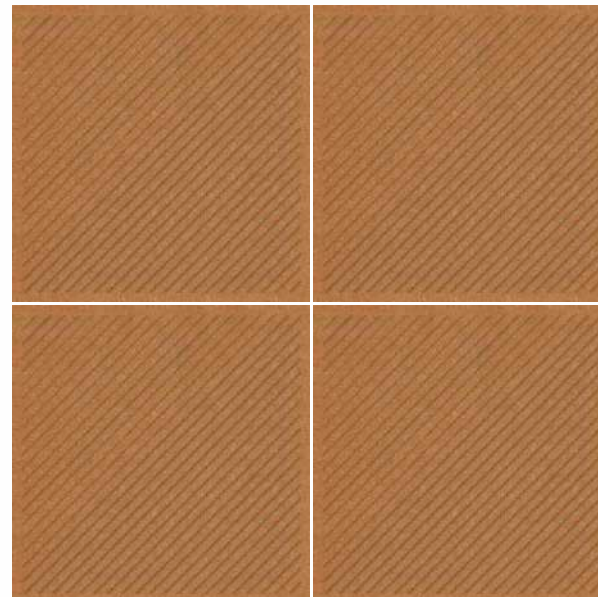

PODERO BROWN

V1

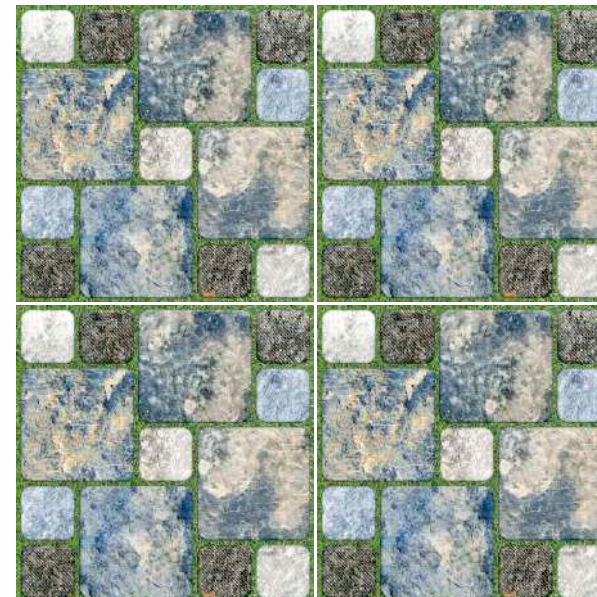

SPARTA BLUE

V1



SPARTA BROWN

V1



DURASTONE
HEAVY DUTY VITRIFIED TILES


TARRACO BEIGE

ULTRA STRONG
OUTDOOR VITRIFIED TILES

400x
400mm




DURASTONE
HEAVY DUTY VITRIFIED TILES

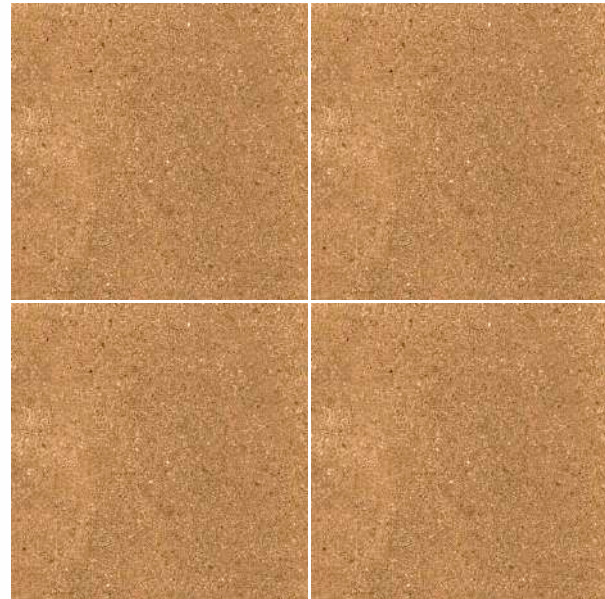


SANFORD BROWN

V1

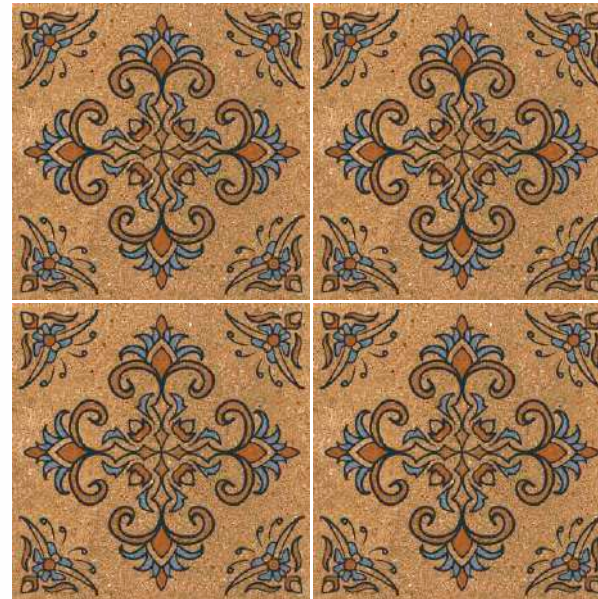


SANFORD DECOR

V1

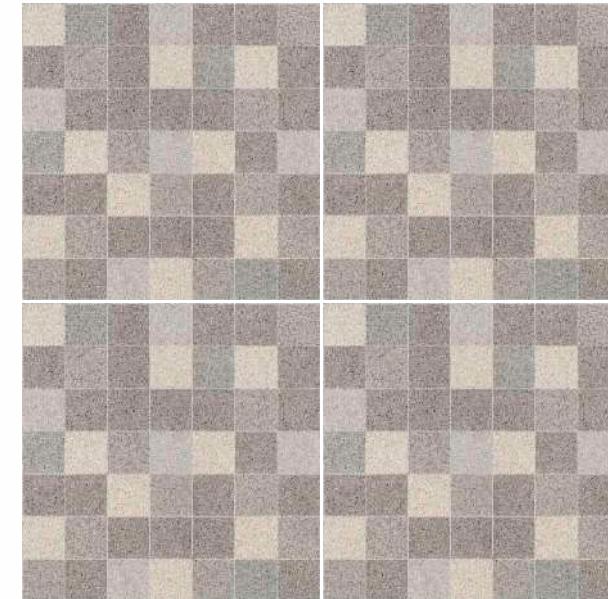


TIERRA NERO DÉCOR

V1

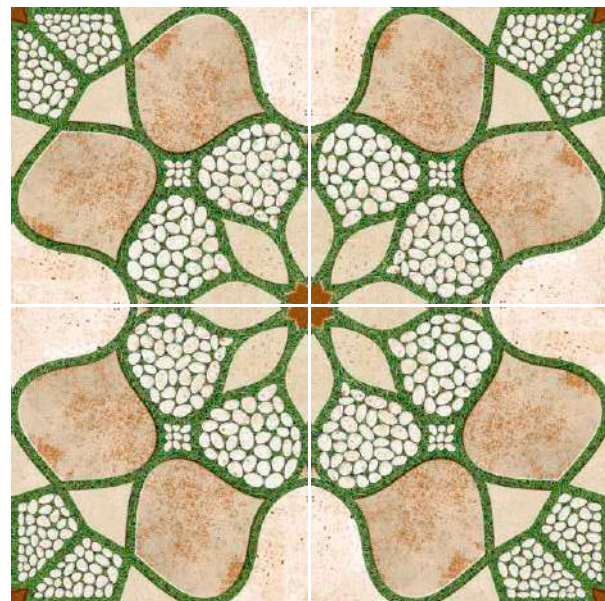


TARRACO BEIGE

V1

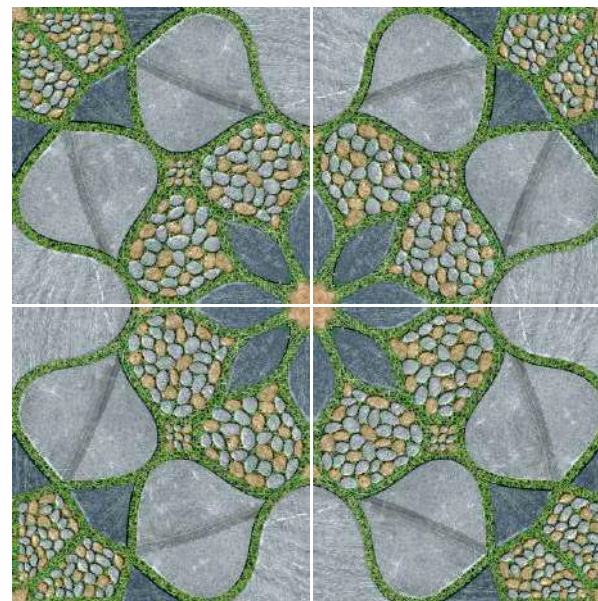


TARRACO GRIS

V1

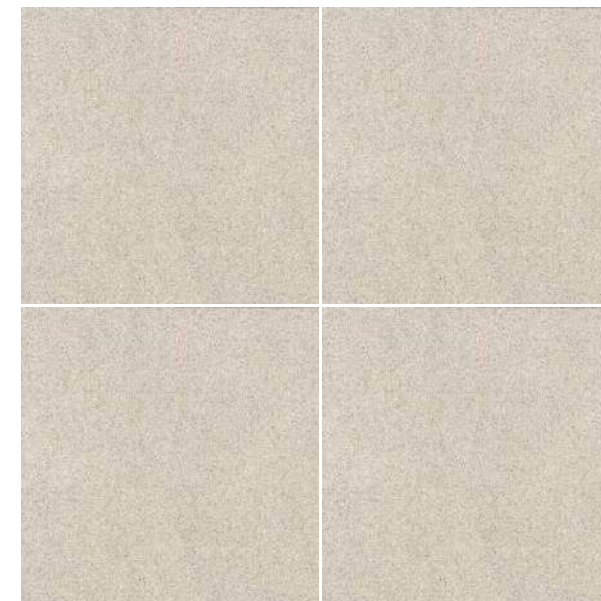

TIERRA BIANCO

V1

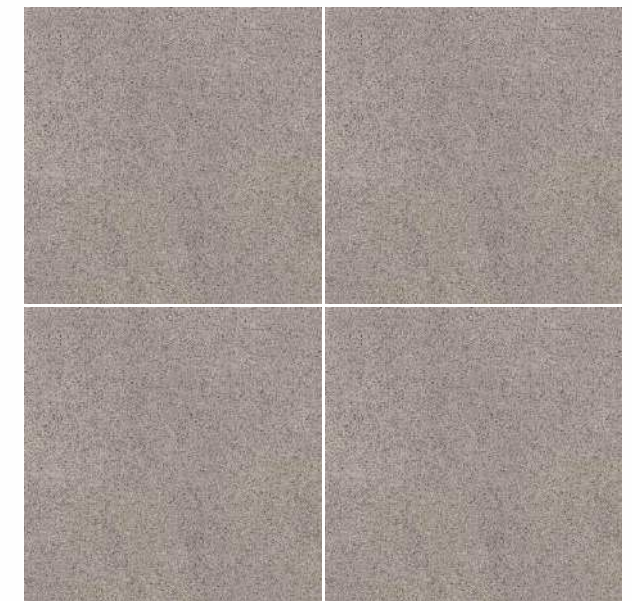

TIERRA NERO

V1

DURASTONE
HEAVY DUTY VITRIFIED TILES




ULTRA STRONG

OUTDOOR VITRIFIED TILES

400x
400mm


- Anti Skid
- High Flexural Strength
- Wear Resistance
- Fire Resistance
- Frost Resistance
- Chromatic Properties
- Eco Friendly & Recyclable
- Chemical Resistance

DURASTONE
HEAVY DUTY VITRIFIED TILES

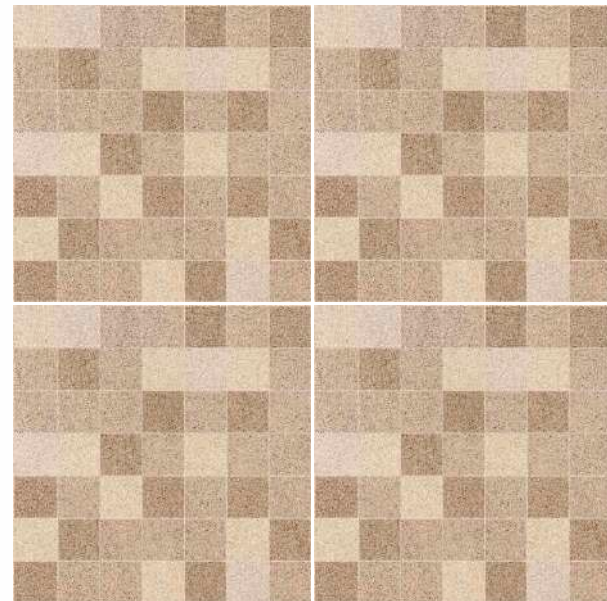


TIERRA BROWN DÉCOR

V1

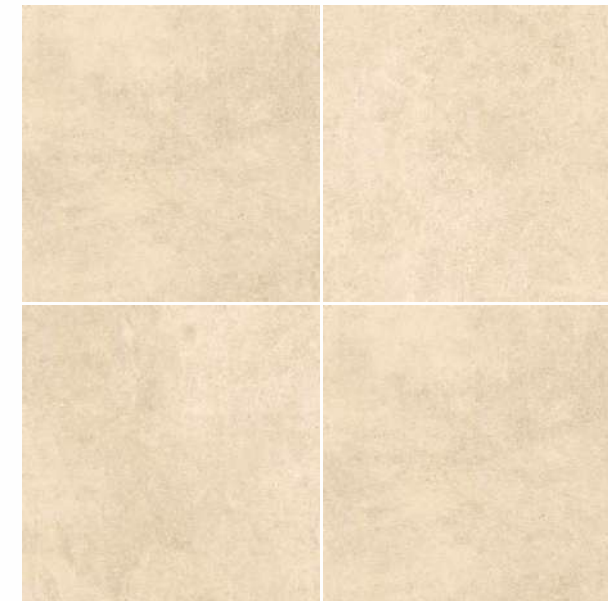


VERIN BEIGE

V3

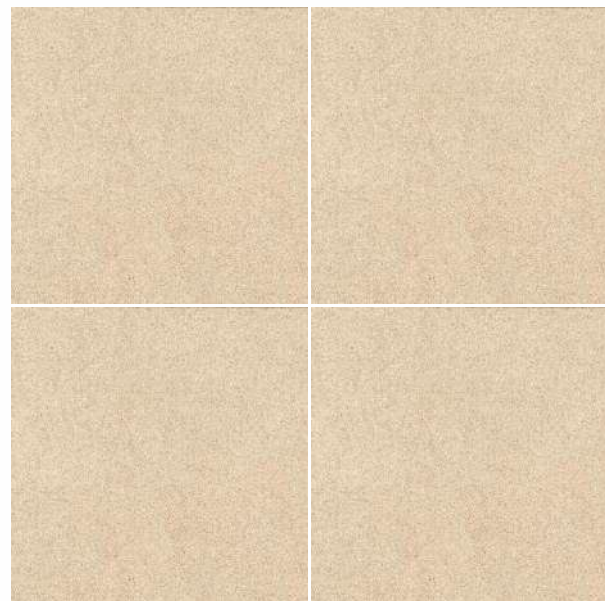


TIERRA IVORY

V1

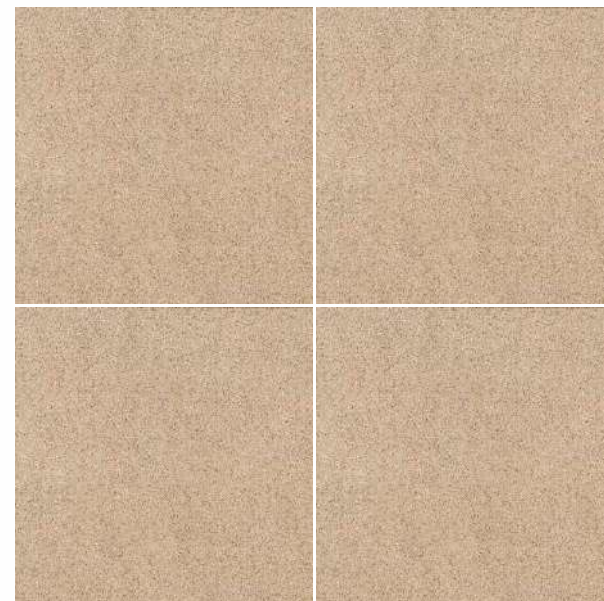


TIERRA BROWN

V1

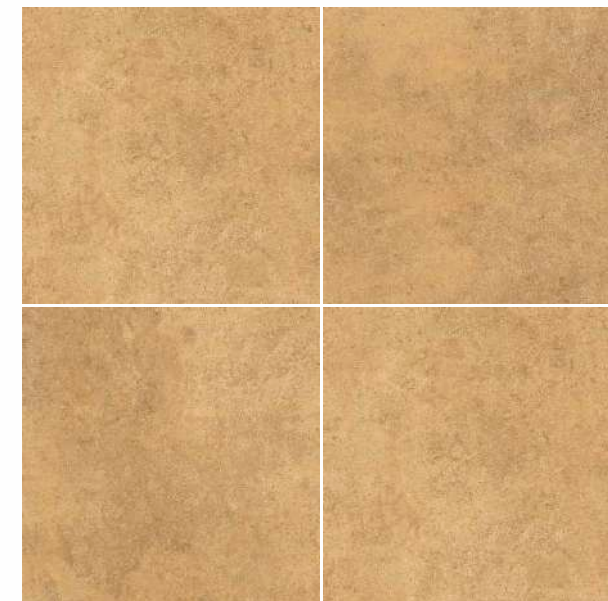

VERIN BROWN


V3



DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.


Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.

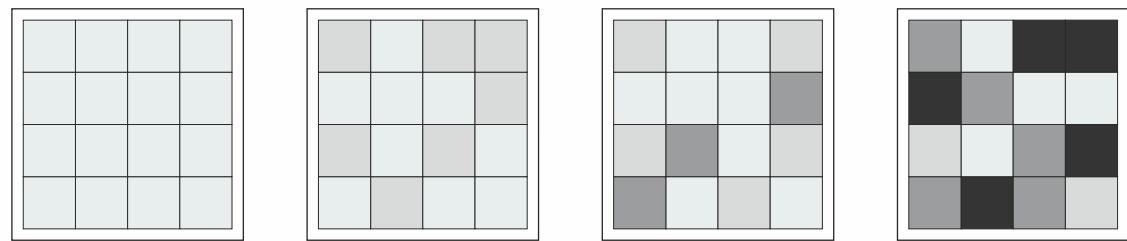

V1 Uniform Appearance **V2** Slight Variation **V3** Moderate Variation **V4** Substantial Variation

The classification is as follow:

- V1** Minimal Variation
- V2** Slight Variation
- V3** Random Variation
- V4** Substantial Variation

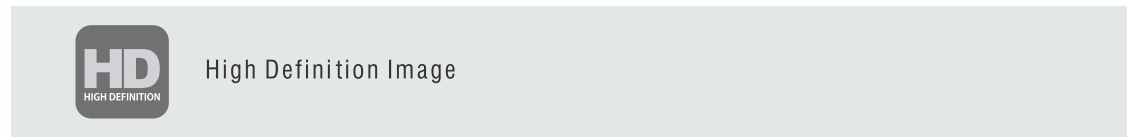

While laying the tiles please follow the arrow on the back of the tiles.
For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder. And use with spacer to look good

PACKAGING DETAIL FOR 400x400MM FLOOR TILES

Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
400 X 400MM	11.5 mm	20.00 Kg.	5 Pcs	0.80 Sq.mt / 8.61 Sq.ft

TECHNICAL SPECIFICATIONS FOR 400x400MM FLOOR TILES

Characteristics	Requirements as per IS 15622 :2017 0.08<E ≤ 3% Group Blb	Requirements as per ISO 13006<0.5% Group Bla	Our Values	Test Method
A) Dimension & Surface Quality				
I) Length & Width	±0.10%	±0.6%	±0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	±0.10%	±0.50%	±0.10%	
iv) Rectengularity	±0.10%	±0.50%	±0.10%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	±0.50 %	±0.50 %	±0.2 %	
b) Edge curvature (%) (max.Deviation)	±0.50 %	±0.50 %	±0.2 %	
c) Corner warpage (%) (max.Deviation)	± 0.50 %	± 0.50 %	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
I) Water Absorption	Av. 0.08< E ≤ 3 %, Individual 3.3 max	Av ≤ 0.5 %, Individual 0.6% max	Av <0.2 % , Max 0.5 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm2]	Av 30, Individual 27 min	Av 35, Individual 32 min	> 40	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1100	1300	3000	
iv) Moisture Expansion in mm/m	0.02	Declared Value F	0.02	IS 13630 Part 3/ISO-10545-10
iv) Scratch Hardness of surface (Mohs)	Min 5	N.A.	Min-6	IS 13630 Part 13
v) Surface Abrasion Resistance	Min II	Abrasion Class & Cycle passed	Class V	IS 13630 Part 11 /ISO 10545-7
vi) Coefficient of linear thermal expansion from ambient temperature to 100° C	Max. 7 X 10 ⁻⁶ K ⁻¹ max	Declared Value F	Max. 6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
vii) Thermal Shock Resistance	10 cycle min	Passed According to EN-ISO 10545-1 ⁹	10 cycle Passed	IS 13630 Part 5/ISO-10545-9
Viii) Craziing Resistance	4 cycle @ 7.5bar min	Passed According to EN-ISO 10545-1 ⁹	4 cycle passed	IS 13630 Part 9/ISO 10545-11
vii) Impact Resistance as Co-efficient of Restitution	0.55 min	Declared Value F	0.75-0.90	ISO 10545-5
Viii) Frost Resistance	Required	Passed According to EN-ISO 10545-1 ⁹	100 Cycle passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
I) Stain Resistance	Min Class-1	Min Class-3	Min Class-1	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min Class GA	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value	Min Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order. Technical Specifications for Somany Wall & Floor Tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

SOMANY
Bathware

Our
PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

SOMANY

Ezy Fix
TILE ADHESIVE



**HIGH STRENGTH POLYMER MODIFIED
TILE ADHESIVE**



BENEFITS

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- » FAST SETTING
- » SELF-CURING

USES

- » FOR FIXING ALL TYPE OF TILES
- » FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE